ISO9001: 2015

ISO14001: 2015

# APPROVAL SPECIFICATIONS

Title. TACT SWITCH

Product Model. KAN0652-0501C0101-42

Customer's Part NO.

Customer's Model:

Customer's Approval Requested.

Please return this copy as a certification of your approval.

Checked by: Date:

Approved by: Date:

Swiclick

Address:Rm. D1/25F,No 2070,Electronical Technology Building-C,Shennan Mid-road,Futian Dist.,Shenzhen,China.

Website:https://www.swiclick.com

Swiclick

# APPROVAL SPECIFICATIONS

| Product name | P/N | Version | Document No. | Page |
|---|---|---|---|---|
| Tact switch | KAN0652-0501C0101-42 | A/00 | | 2/12 |

| | | | |
|---|---|---|---|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

# APPROVAL SPECIFICATIONS

| Product name | P/N | Version | Document No. | Page |
|---|---|---|---|---|
| Tact switch | KAN0652-0501C0101-42 | A/00 | | 3/12 |

**1**

GENERAL

1.1

APPLICATION

This specification is applied to the requirements for tactile switch (mechanical contact)

1.2

Operating Temperature Range

-30 80 ( )

-30 80 (Normal humidity, normal air pressure)

1.3

Storage Temperature Range

-40 90 ( )

-40 90 (Normal humidity, normal air pressure)

1.4

Test Conditions

Unless otherwise specified, tests and measurement shall be made in the following standard conditions:

……5 35

Normal temperature……5 35

…… 25% 85%

Normal humidity……relative humidity 25% 85%

……86Kpa 106Kpa

Normal air pressure……86Kpa 106Kpa

If any doubt arise from the judgment, tests shall be conducted at the following conditions:

……20 ±2

Temperature……20 ±2

……65%±5%

Relative humidity…….....…65%±5%

……86Kpa 106Kpa

Air pressure……86Kpa 106Kpa

1.5

Storage method

**1.** .

Ensure that the product without package breaking or wetting before use.

**2.** Storage conditions:

Storage temperature -5 ~ 35

Storage humidity 25% ~80%

6 6

Unopened status: Use up the product as soon as possible before 6 months. (calculated from shipment date).Over 6 months, please make sure below before use it: terminal without oxidation or blackening, plastic parts without moisture absorption or bubble, ensure solderability.

**1**

Opened status: use up within 1 month;

Storage precautions: Please avoid the following environment: with high humidity, high temperature , corrosive gases and direct sunlight.

**3.** .

Do not stack too many switches.

Swiclick

# APPROVAL SPECIFICATIONS

| Product name | P/N | Version | Document No. | Page |
|---|---|---|---|---|
| Tact switch | KAN0652-0501C0101-42 | A/00 | | 4/12 |

**2**

Detailed specification

2.1

Appearance: There should be no defects that affect the serviceability of product.

2.2

Style and dimension: shall conform to the assemble drawings.

2.3

Type of actuating: Tactile feedback.

2.4 ( )

Contact arrangement: 1 pole, 1 throw

(Details of contact arrangement are given in the assembly drawings.)

2.5 DC 12V 50mA DC 1V 10μA

Ratings: DC 12V 50mA Max DC 1V 10μA Min

**3**

**ELECTRICAL SPECIFICATION**

| ITEM | | TEST CONDITIONS | REQUIREMENTS |
|---|---|---|---|
| 3.1 | Contact Resistance | 5V 10mA 1KHz<br>2<br>Applying a static load of 2 times operating force to the center of the stem, measurements shall be made by 5V DC 10mA or more than 1KHz AC small-current contact resistance meter. | ≤100mΩ |
| 3.2 | Insulation Resistance | DC 100V /min ,<br>Measurement shall be made following application of 100V DC potential, across terminals, and across terminals and cover, for one minute. | ≥100MΩ |
| 3.3 | Dielectric voltage proof | 250V AC(50Hz 60Hz)/min<br>250V AC (50Hz or 60Hz) shall be applied across terminals, for one minute. | There should be no breakdown and flashover |

| Product name | P/N | Version | Document No. | Page |
|---|---|---|---|---|
| Tact switch | KAN0652-0501C0101-42 | A/00 | | 5/12 |

| ITEM | | TEST CONDITIONS | REQUIREMENTS |
|---|---|---|---|
| 3.4 | Bounce | 3 4<br>Lightly striking the center of the stem at a rate encountered in normal use (3 to 4 times per second), and bounce shall be tested at “ON” and “OFF”<br> 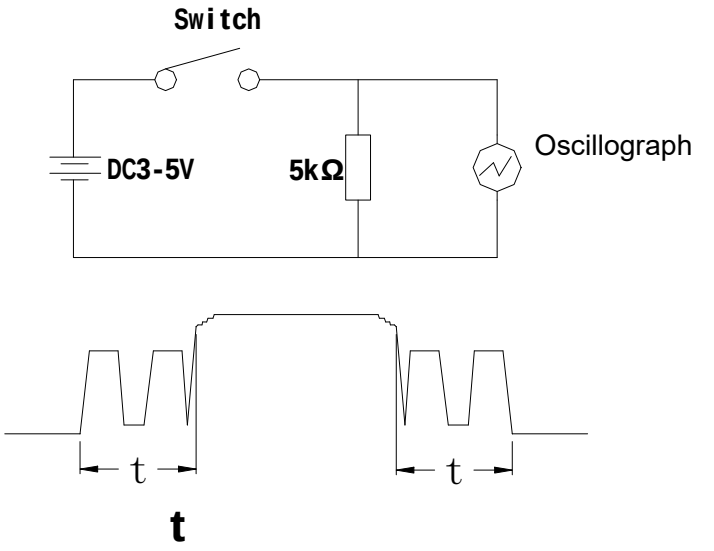 | ON-10ms max<br>OFF-10ms max |
| **4**<br>**MECHANICAL SPECIFICATION** | | | |
| 4.1 | Operating Force | Placing the switch such that the direction of switch operation is vertical and then gradually increasing the load applied to the center of the stem, the maximum load required for the switch to come to a stop shall be measured. | 260±50 gf |
| 4.2 | Full Travel | 2<br>Placing the switch such that the direction of switch operation is vertical and then applying static load of 2times operating force to the center of the stem; the travel distance for the switch to come to a stop shall be measured. | 0.25±0.1mm |

Swiclick

# APPROVAL SPECIFICATIONS

| Product name | P/N | Version | Document No. | Page |
|---|---|---|---|---|
| Tact switch | KAN0652-0501C0101-42 | A/00 | | 6/12 |

| ITEM | | TEST CONDITIONS | REQUIREMENTS |
|---|---|---|---|
| 4.3 | Return Force | The sample switch is installed such that the direction of switch operation is vertical and upon depressing the stem in its center to the whole travel distance, the force of the stem to return to its free position shall be measured. | 20gf Min |
| 4.4 | Stop Strength | 30N<br>1min<br>Placing the switch such that the direction of switch operation is vertical, and then a static load of 30N shall be applied in the direction of stem operation for a period of 1 min. | There shall be no sign of damage mechanically and electrically. |
| 4.5 | Stem Strength | Placing the switch such that the direction of switch operation is vertical, and then the maximum force to withstand a pull applied opposite to the direction of stem operation shall be measured. | 10N min. |
| 4.6 | Vibration | Measurement shall be made following the test set forth below:<br>1 10 55 10Hz<br>Vibration frequency range: 10 to 55 to 10Hz<br>2 1.5mm<br>Amplitude: 1.5mm<br>3<br>Direction of vibration:Three mutually perpendicular direction including the direction of stem travel<br>4 2<br>Duration: Each 2 hours. | Item3.1<br>Item3.2<br>Item3.3<br>Item4.1<br>Item4.2<br>Item4.3 |
| 4.7 | Shock | Test by following conditions<br>(1)<br>(1)installation method: normal<br>(2) 784m/s²<br>(2)Acceleration: 784m/s²<br>(3) 11ms<br>(3)Acting time: 11ms<br>(4) 6<br>3 18<br>(4)Test direction: 6 directions<br>Times: 3 times/direction ,total 18 times<br>  | Item3.1<br>Item3.2<br>Item3.3<br>Item4.1<br>Item4.2<br>Item4.3 |

Swiclick

# APPROVAL SPECIFICATIONS

| Product name | P/N | Version | Document No. | Page |
|---|---|---|---|---|
| Tact switch | KAN0652-0501C0101-42 | A/00 | | 7/12 |

**5**
**ENVIRONMENTAL SPECIFICATION**

| ITEM | | TEST CONDITIONS | REQUIREMENTS |
|---|---|---|---|
| 5.1 | Resistance to low temperature | 1<br>Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 h before measurements are made:<br>1 -40±2<br>Temperature : -40±2<br>2 96h<br>Time: 96h | Item3.1<br>Item3.2<br>Item3.3<br>Item4.1<br>Item4.2<br>Item4.3 |
| 5.2 | Heat resistance | 1<br>Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 h before measurements are made:<br>1 90±2<br>temperature:90±2<br>2 96h<br>time: 96h | Item3.1<br>Item3.2<br>Item3.3<br>Item4.1<br>Item4.2<br>Item4.3 |
| 5.3 | Change of temperature | 5<br>1<br>.<br>After 5 cycles of following conditions, the sample shall be allowed to stand under normal temperature and humidity conditions for 1 h. and measurements shall be made. During the test water drops shall be removed.<br> 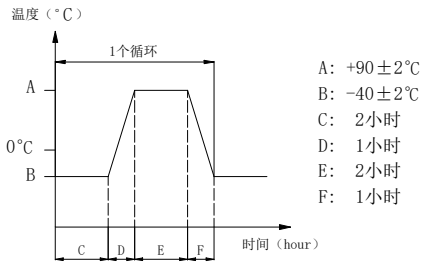 | Item3.1<br>Item3.2<br>Item3.3<br>Item4.1<br>Item4.2<br>Item4.3 |
| 5.4 | Moisture resistance | 1<br>Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 h before measurements are made:<br>1 60±2<br>temperature: 60±2<br>2 90% 95%<br>relative humidity:90% to 95%<br>3 96h<br>time: 96h | ≤200mΩ<br>Contact resistance≤200mΩ<br>≥10MΩ<br>Insulation Resistance≥10MΩ<br>Item3.3<br>Item4.1<br>Item4.2<br>Item4.3 |

Swiclick

# APPROVAL SPECIFICATIONS

| Product name | P/N | Version | Document No. | Page |
|---|---|---|---|---|
| Tact switch | KAN0652-0501C0101-42 | A/00 | | 8/12 |

| ITEM | | TEST CONDITIONS | REQUIREMENTS |
|---|---|---|---|
| 5.5 | Sulfuration resistance | 1<br>Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 h before measurements are made:<br>1 $H_2S$ 3ppm±1ppm<br>$H_2S$ gas concentration: 3ppm±1ppm<br>2 72h<br>Time: 72h<br>3 40±2 90 95%RH<br>temperature: 40±2 90 95%RH | ≤200mΩ<br>Contact resistance≤200mΩ |
| 5.6 | Salt Mist | :<br>The switch shall be checked after following test:<br>1 35 ±2<br>temperature: 35 ±2<br>2 5±1%<br>salt solution : 5±1%(solids by mass)<br>3 48±1h<br>Time 48±1h<br><br>After test, salt deposit shall be removed by running water. | No remarkable corrosion shall be recognized in metal part. |
| 5.7 | Operation life | Measurement shall be made following the test set forth below:<br>1 DC 5V 5mA<br>DC 5V, 5 mA resistive load<br>( 2 ) 1 /<br>Rate of operation: 1 times/s<br>( 3 )<br>Operating Force According to the maximum value of force<br>( 4 ) 100,000<br>life 100,000 cycles | ≤1Ω<br>Contact resistance≤1Ω<br>≥10MΩ<br>Insulation Resistance≥10MΩ<br>ON-20ms max<br>Bounce OFF-20ms max<br>±30%<br>Operating Force:<br>initial value±30%<br>Item3.3<br>Item4.2 |

| Product name | P/N | Version | Document No. | Page |
|---|---|---|---|---|
| Tact switch | KAN0652-0501C0101-42 | A/00 | | 9/12 |

| ITEM | | TEST CONDITIONS | REQUIREMENTS |
|---|---|---|---|
| 5.8 | Solderability | :<br>Measurements shall be made following the test set forth below:<br>(1) :235±5<br>Solder temperature : 235±5<br>(2) :3s±0.5s<br>Immersion time: 3s±0.5s | 90%<br>Except for the edge, the coating should cover a minimum 90% |
| **6**<br>**SOLDERING CONDITIONS:** | | | |
| 6.1 | Hand soldering | (1) ≤350<br>(2) ≤3 s<br>Please practice according to below conditions:<br>(1) Soldering temperature: ≤350<br>(2) Continuous soldering time: ≤3 s | |

Swiclick

# APPROVAL SPECIFICATIONS

| Product name | P/N | Version | Document No. | Page |
|---|---|---|---|---|
| Tact switch | KAN0652-0501C0101-42 | A/00 | | 10/12 |

| ITEM | | Recommended conditions | |
|---|---|---|---|
| 6.2 | Conditions for Auto-dip | Items | Condition |
| | | Flux built-up | Mounting surface should not be coated with flux |
| | | Preheating temperature | 100 max.<br>Ambient temperature of the soldered surface of PC board.<br>100 max. |
| | | Preheating time | 60s max. |
| | | Soldering temperature | 260 max. |
| | | Continuous dipping time | 5s max. |
| | | Number of soldering | 2times max. |

**(Notes)**

a

The pad size of the printed substrate is shown in the product diagram.

b 350 3

In the case of using soldering iron, soldering conditions shall be 350 max and 3 sec.max.

c

Prevent flux penetration from the top of the switch

d

After switches were soldered,please be careful not to clean switches with solvent or other similar products.

e

Right after switches were soldered;please be careful not to load to on the knobs of switches.

f

Please be cautions not to give excessive static load or shock to switches.

g

Please be careful not to pile up P.W.B.after switches were soldered

# APPROVAL SPECIFICATIONS

| Product name | P/N | Version | Document No. | Page |
|---|---|---|---|---|
| Tact switch | KAN0652-0501C0101-42 | A/00 | | 11/12 |

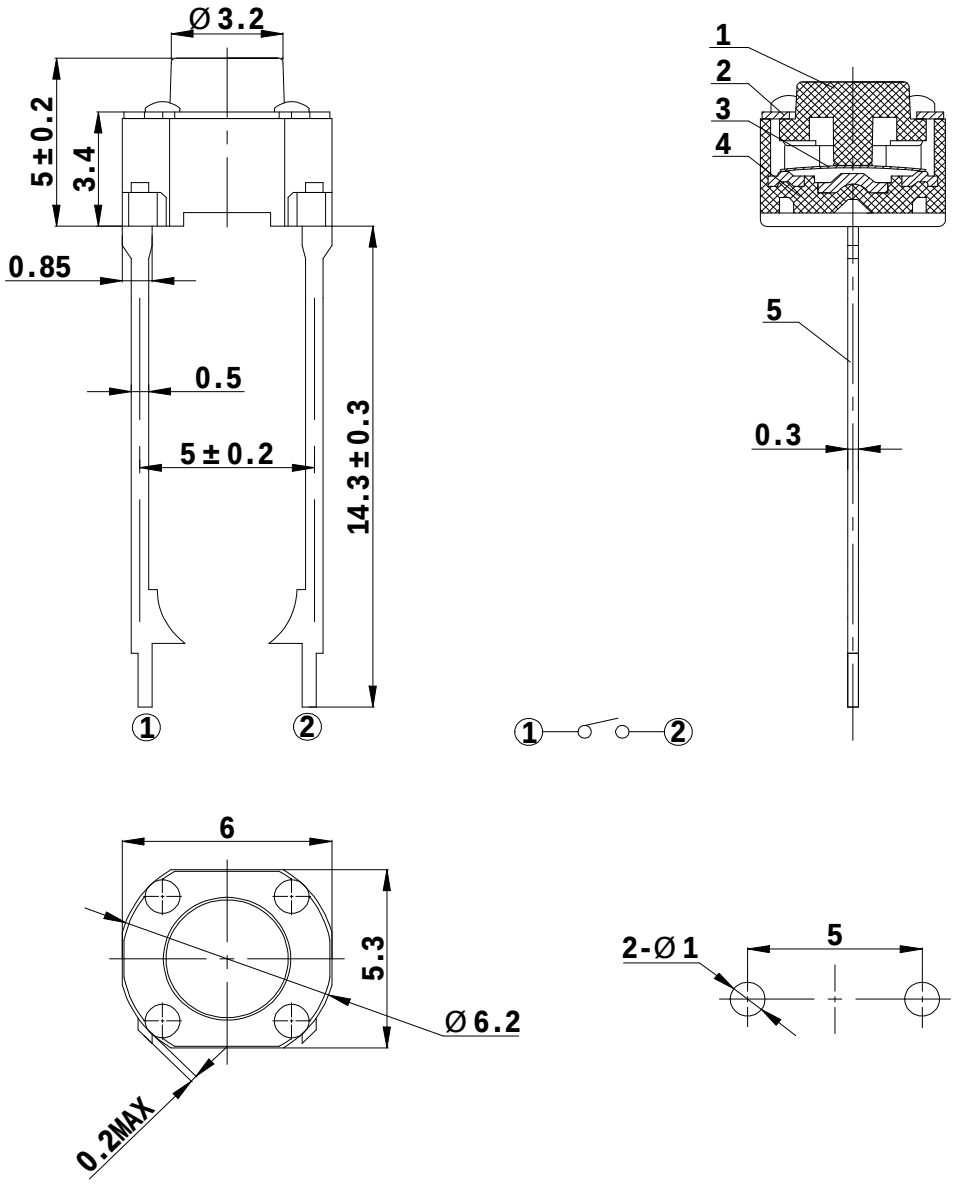


General tolerance ±0.2mm

| NO. | NAME | MATERIAL | QTY. | FINISHING |
|---|---|---|---|---|
| 1 | Terminal | Brass | 1 | Silver plating |
| 2 | Case | PA66 | 1 | Black |
| 3 | Contact | SUS | 1 | Ag plating |
| 4 | Cover | Brass | 1 | CuSn plating |
| 5 | Stem | PA66 | 1 | Black |

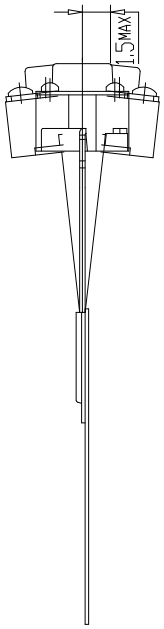


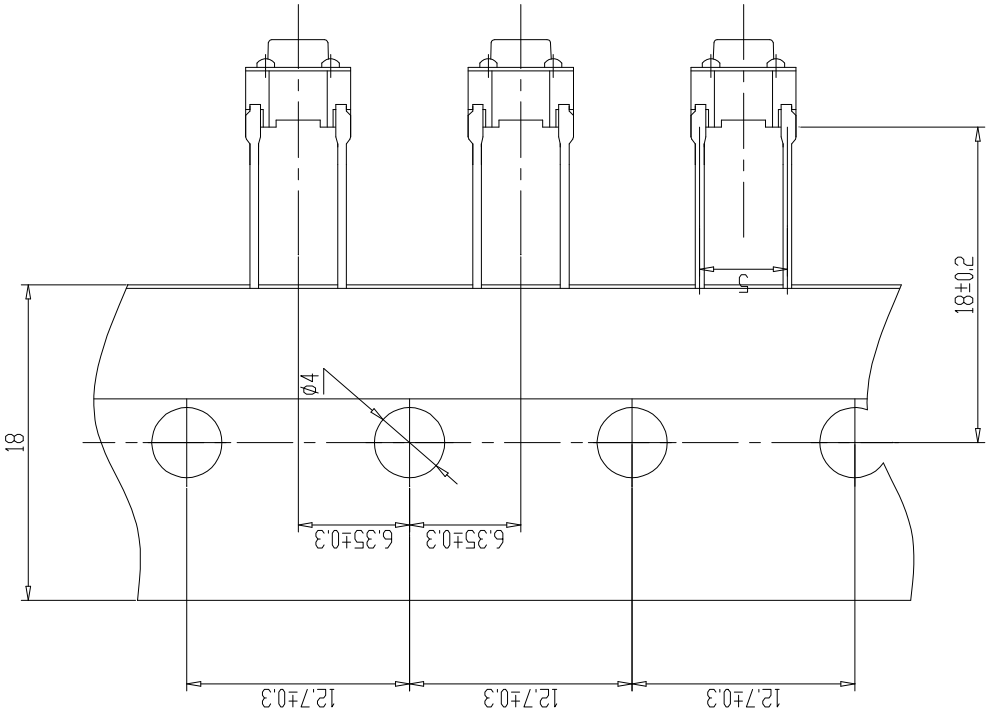


技术要求

1. 成品包装数量每盒2500只
2. 每盒纸带编好后，前后空150mm-160mm
3. 未注公差 ±0.2

| 标记 | 处数 | 更改文件号 | 签字 | 日期 | 编带图纸 | Swiclick |
|---|---|---|---|---|---|---|
| 设计 | | 会审 | | | 材料 | HRC | KAN0652A轻触开关 |
| 绘图 | | | | | 图样标记 | 重量 | 比例 |
| 批准 | | | | | | |
| 日期 | | | | | 共 1 页 | 第 1 页 | |